



A 40-MIL, ASPHALTIC, PEEL-AND-STICK FLASHING MEMBRANE

MortarFlash™

- Rubberized Asphalt Flashing

DESCRIPTION

MortarFlash™ Rubberized Asphalt Flashing is a 40-mil prefabricated self-adhering sheet-type waterproofing membrane composed of a high-tensile polyester film coated with a layer of specially formulated rubberized asphalt adhesive. MortarFlash adheres aggressively to most clean, dry substrates including metal, wood vinyl, and masonry.


- Easy-to-remove release sheet protects the adhesive until installation
- Self seals around fasteners and punctures
- Primer is recommended along with the use of a termination bar and a bead of sealant under the leading edge of the flashing
- 3" side laps and 6" end laps recommended
- Apply uniform pressure with hand roller over entire surface
- When the use of prefabricated accessories is not feasible, MortarFlash™ Non-Asphaltic can be used to create inside and outside corners.

Caution

- Do not install over solvent based sealants unless fully cured.
- Do not install over PVC and silicone roofing materials
- Do not install over flexible vinyl gaskets

TECHNICAL DATA

Property	Typical Value
Flexibility @ -20°F	Pass
Adhesion to SS @ 73°F	18.5 lbf/in
Tensile MD	34.5 lbf/in
Tensile CMD	43.5 lbf/in
Elongation MD	160%
Elongation CMD	109%

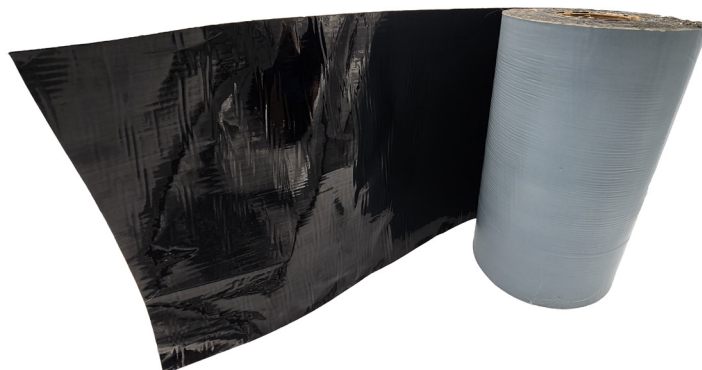

Sizes & Packaging

Thickness	Roll Height	Roll Length	Rolls/Box	SF/Box	Boxes/Pallet
0.040"	12"	75'	3	225	25
	18"		2		

AVAILABLE FLASHING COMPONENTS

Recommended for use with MortarFlash Rubberized Asphalt

Termination Bars

- PVC - 1/8" thick, UV stabilized
- Stainless steel - 16 gauge Type 304
- Stainless steel w/ lip - 16 gauge Type 304

Drip Edge

- Stainless steel - 28 gauge Type 304
- Kynar-coated galvanized steel - 24 gauge
- Cold-rolled copper - 24 gauge

CompleteFlash Inside/Outside Corners & End Dams

- Synthetic rubber

Metal Drip Edge Corners

- Pre-formed Outside 90°
- Adjustable 325° to 22°

Sealant

- BTL-1 Butyl

