




A 40-MIL, ASPHALTIC, PEEL-AND-STICK FLASHING MEMBRANE

MortarFlash™ - Rubberized Asphalt Flashing

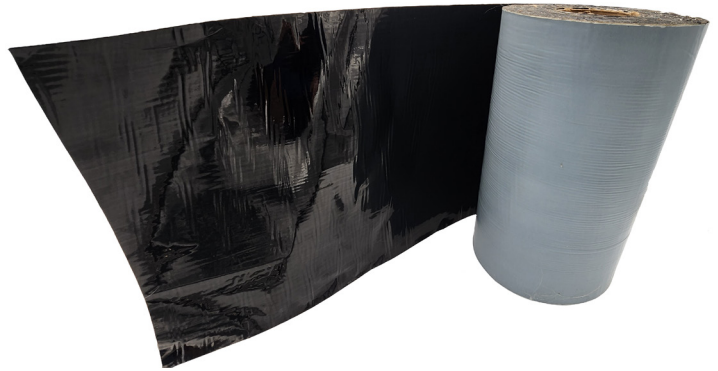

DESCRIPTION

MortarFlash™ Rubberized Asphalt Flashing is a 40-mil prefabricated self-adhering sheet-type waterproofing membrane composed of a high-tensile polyester film coated with a layer of specially formulated rubberized asphalt adhesive. MortarFlash adheres aggressively to most clean, dry substrates including metal, wood vinyl, and masonry.

AVAILABLE FLASHING COMPONENTS

Recommended for use with MortarFlash Rubberized Asphalt

Termination Bars

- PVC - 1/8" thick, UV stabilized
- Stainless steel - 16 gauge Type 304
- Stainless steel w/ lip - 16 gauge Type 304

Drip Edge

- Stainless steel - 28 gauge Type 304
- Kynar-coated galvanized steel - 24 gauge
- Cold-rolled copper - 24 gauge

CompleteFlash Inside/Outside Corners & End Dams

- Synthetic rubber

Metal Drip Edge Corners

- Pre-formed Outside 90°
- Adjustable 325° to 22°

Sealant

- BTL-1 Butyl

SUBMITTAL SELECTIONS

Width (rolls are 75 ft. long)

- 12" 18" Other _____

Stainless Steel Drip Plate

- 1-1/2" 3" 4"

Metal Drip Edge Corner

- Pre-formed Outside 90° Adjustable 325° to 22°

Termination Bar w/ Lip

- Stainless Steel Plastic

Termination Bar Flat

- Stainless Steel

CompleteFlash Inside/Outside Corners & End Dams

- Synthetic Rubber (SR)

Sealant

- BTL-1 Butyl Sealant

Specification Title: _____

Project: _____ Date: _____

Firm: _____ Phone: _____

Approval: _____ Date: _____

General Contractor: _____

Bid Date: _____


Comments: _____





A 40-MIL, ASPHALTIC, PEEL-AND-STICK FLASHING MEMBRANE

MortarFlash™ - Rubberized Asphalt Flashing

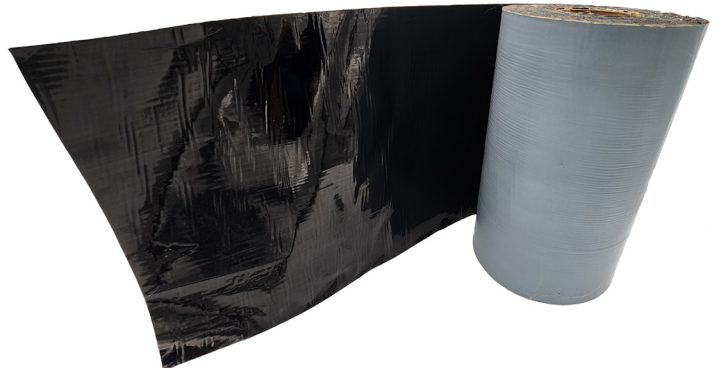

DESCRIPTION

MortarFlash™ Rubberized Asphalt Flashing is a 40-mil prefabricated self-adhering sheet-type waterproofing membrane composed of a high-tensile polyester film coated with a layer of specially formulated rubberized asphalt adhesive. MortarFlash adheres aggressively to most clean, dry substrates including metal, wood vinyl, and masonry.

- Easy-to-remove release sheet protects the adhesive until installation
- Self seals around fasteners and punctures
- Primer is recommended along with the use of a termination bar and a bead of sealant under the leading edge of the flashing
- 3" side laps and 6" end laps recommended
- Apply uniform pressure with hand roller over entire surface
- When the use of prefabricated accessories is not feasible, MortarFlash™ Non-Asphaltic can be used to create inside and outside corners.

Caution

- Do not install over solvent based sealants unless fully cured.
- Do not install over PVC and silicone roofing materials
- Do not install over flexible vinyl gaskets

TECHNICAL DATA

Property	Typical Value
Flexibility @ -20°F	Pass
Adhesion to SS @ 73°F	18.5 lbf/in
Tensile MD	34.5 lbf/in
Tensile CMD	43.5 lbf/in
Elongation MD	160%
Elongation CMD	109%

Sizes & Packaging

Thickness	Roll Height	Roll Length	Rolls/Box	SF/Box	Boxes/Pallet
0.040"	12"	75'	3	225	25
	18"		2		

AVAILABLE FLASHING COMPONENTS

Recommended for use with MortarFlash Rubberized Asphalt

Termination Bars

- PVC - 1/8" thick, UV stabilized
- Stainless steel - 16 gauge Type 304
- Stainless steel w/ lip - 16 gauge Type 304

Drip Edge

- Stainless steel - 28 gauge Type 304
- Kynar-coated galvanized steel - 24 gauge
- Cold-rolled copper - 24 gauge

CompleteFlash Inside/Outside Corners & End Dams

- Synthetic rubber

Metal Drip Edge Corners

- Pre-formed Outside 90°
- Adjustable 325° to 22°

Sealant

- BTL-1 Butyl

