



Moisture
Management
for Masonry

Your reputation. Your legacy. Our mission.

Product Submittal Sheet

LathNet™ Expanded Corner Bead

Description

A solid nose, all-purpose exterior corner bead. Strong and economical with multiple general use purposes. The wide expanded wing flanges are flexible and can compensate for most irregular surfaces providing even grounds and straight corners. The expanded steel near the nose of the corner bead provides multiple plastering and stucco keys allowing for reinforcement and strength where it is needed the most. Used to reinforce Portland cement stucco at external corners.

Product Data & Ordering Information

Material: 0172 base steel, 26 Gauge, G-60 Hot-Dipped Galvanized Steel. Also available in 99.97% pure Zinc, compliant with ASTM B-69.

Dimensions: Nominal 2-7/8" Full Wing Flange

Length	Pcs./Ctn.	Ft./Ctn.	Ctn./Skid	Wt./Ctn.
10'	30	300'	20	49 lbs

ASTM & Code Standards:

- ASTM C841 (interior), C1063, CE 240.01 (exterior), ASTM C926, UBC, ML/SFA-920, the International Code Council IBC and IRC.
- All Expanded Metal Lath Accessories are fabricated from prime galvanized steel G60 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69 as required in ASTM C1063 and C847.
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- For installation and placement instructions refer to ASTM C1063, C841 and C926.
- Intertek CCRR-0204

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.

Related Accessories:


- #2A-Reinforced Flange Expanded Corner Bead
- Cornerite - Used as a plaster reinforcement on inside corners

Substitutions

No substitutions permitted.

LN-43403

 LathNet™

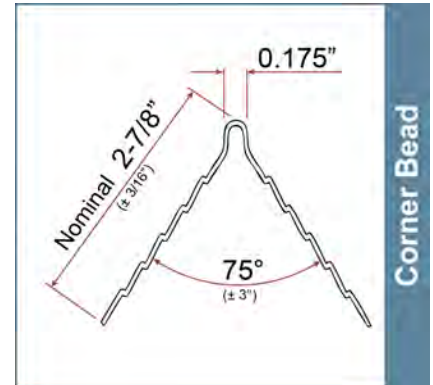

Specification Title: _____	
Project: _____	Date: _____
Firm: _____	Phone: _____
Approval: _____	Date: _____
General Contractor: _____	
Bid Date: _____	
Comments: _____	